

## Case Study

Project/customer name:	Restoration of historical fountains
Year of application:	2015
Location/country:	Versailles / France
Building type:	Fountain
Authorized contractor:	EMAT
Additional project details:	Solution not affected by standing water

General view:



## Challenge:

- The complete restoration of the fountains had become necessary.
- Dynamic crack-bridging and high elasticity were required in order to enable perfect sealing of complex shapes and details.
- The product used must not be decomposed by standing water after it had been applied.



## Solution:

- Triflex ProTect was chosen for the surface sealing, Triflex ProDetail for the details and Triflex Cryl Finish 205 for the final sealing.
- The PMMA based products are resistant to alkali and hydrolysis and are therefore not affected by standing water.
- The products are applied with a fleece, which provides a high dynamic crack-bridging ability.




## Products used at a glance:

Triflex offers liquid PMMA\* based resins (e.g. ProDetail for details or ProTect for areas):

1. Substrate
2. Primer, if necessary
3. Waterproofing layers
  - a) Triflex ProDetail (2kg / sqm)
  - b) Triflex Special Fleece
  - c) Triflex ProDetail (1 kg / sqm)
4. Finish, if wanted

\* Polymethyl methacrylate

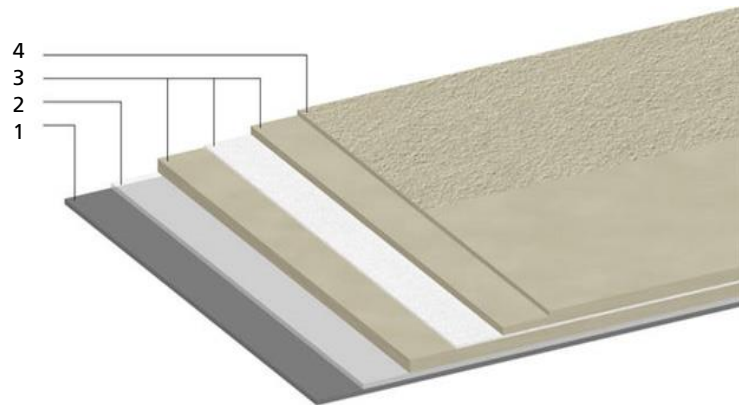

**Continually improved over 40 years in order to become the market leader in Europe.**



## Main benefits (European Guideline ETAG 005):

- 25 years estimated working life performance
- Fast curing time and rainproof after only 30 minutes
- Application possible till humidity of 99% and withstands surface temperature after application up to 90° C
- A liquid seamless solution that fits to any structure with complex geometry
- Adherence to any surfaces (Aluminum, steel, plastic, glass, bitumen, concrete, ...)
- Solvent free, environmental friendly and with no risk to health
- High resistance to chemicals, roots and rhizome, alkali and hydrolysis
- Cold application with no flame and flame retardant
- Highly UV resistant (1000 MJ/m<sup>2</sup> = 325 days)
- Easy to impose loads after application (for particular demands as green roofs)